

CEMCOTE

A finely ground mixture of white Portland cement, pigments and chemicals. It is supplied in powder form requiring mixing with water on-site to produce a smooth, flowing coating which sets rock hard.

YouTube tiny.cc/cemcoteskimmed



BRUSH OR SKIM-ON CEMENT WALL COATING



CemCote Skimmed Concrete Grey

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

BENEFITS

- For interior and exterior use
- Brush-on or skim-on application
- Durable and weatherproof
- Interesting colour variation
- Wears well over time

SPECIFICATIONS

Suitable surfaces	Interior & exterior plastered or previously painted walls
Finish	Slightly textured when applied with a brush Smooth when applied with a trowel
Thickness	1.6-2.5mm
Application	Brush-on or Putzmeister application: Refer to CemCote datasheet Skim-on: Refer to CemCote (Skimmed) datasheet
Packaging	5 & 25kg container
Coverage	Brush-on or Putzmeister application: 2-5m ² per kg/coat depending on suction and texture of the surface or 25-50m ² per 25kg (2 coats). Skim-on: 1-1.1kg's per m ² or 25-30m ² (2 coats) per 25kg drum. Depending on surface texture and porosity.
Curing	Initial set - 1 hour The completed work should be allowed to air cure for 24 hours after application, before mist spraying the entire wall from bottom to top (to prevent run marks) evenly at least twice during the day thereafter. The moisture in the substrate must be less than 5% prior to sealing.
Colour/s	Available in 14 colours













INTENDED FOR USE WITH

Brush-on or Putzmeister application:
CemBond mixed 1:3 with water to prime the wall
CemBond mixed 1:5 with water to mix with the first coat of CemCote

Skim-on application:
FlexBond mixed 1:3 with water

NOTE: For exterior use, replace the FlexBond with CreteBond. Dilution ratios stay the same as for FlexBond.

CEMCOTE | COLOUR RANGE

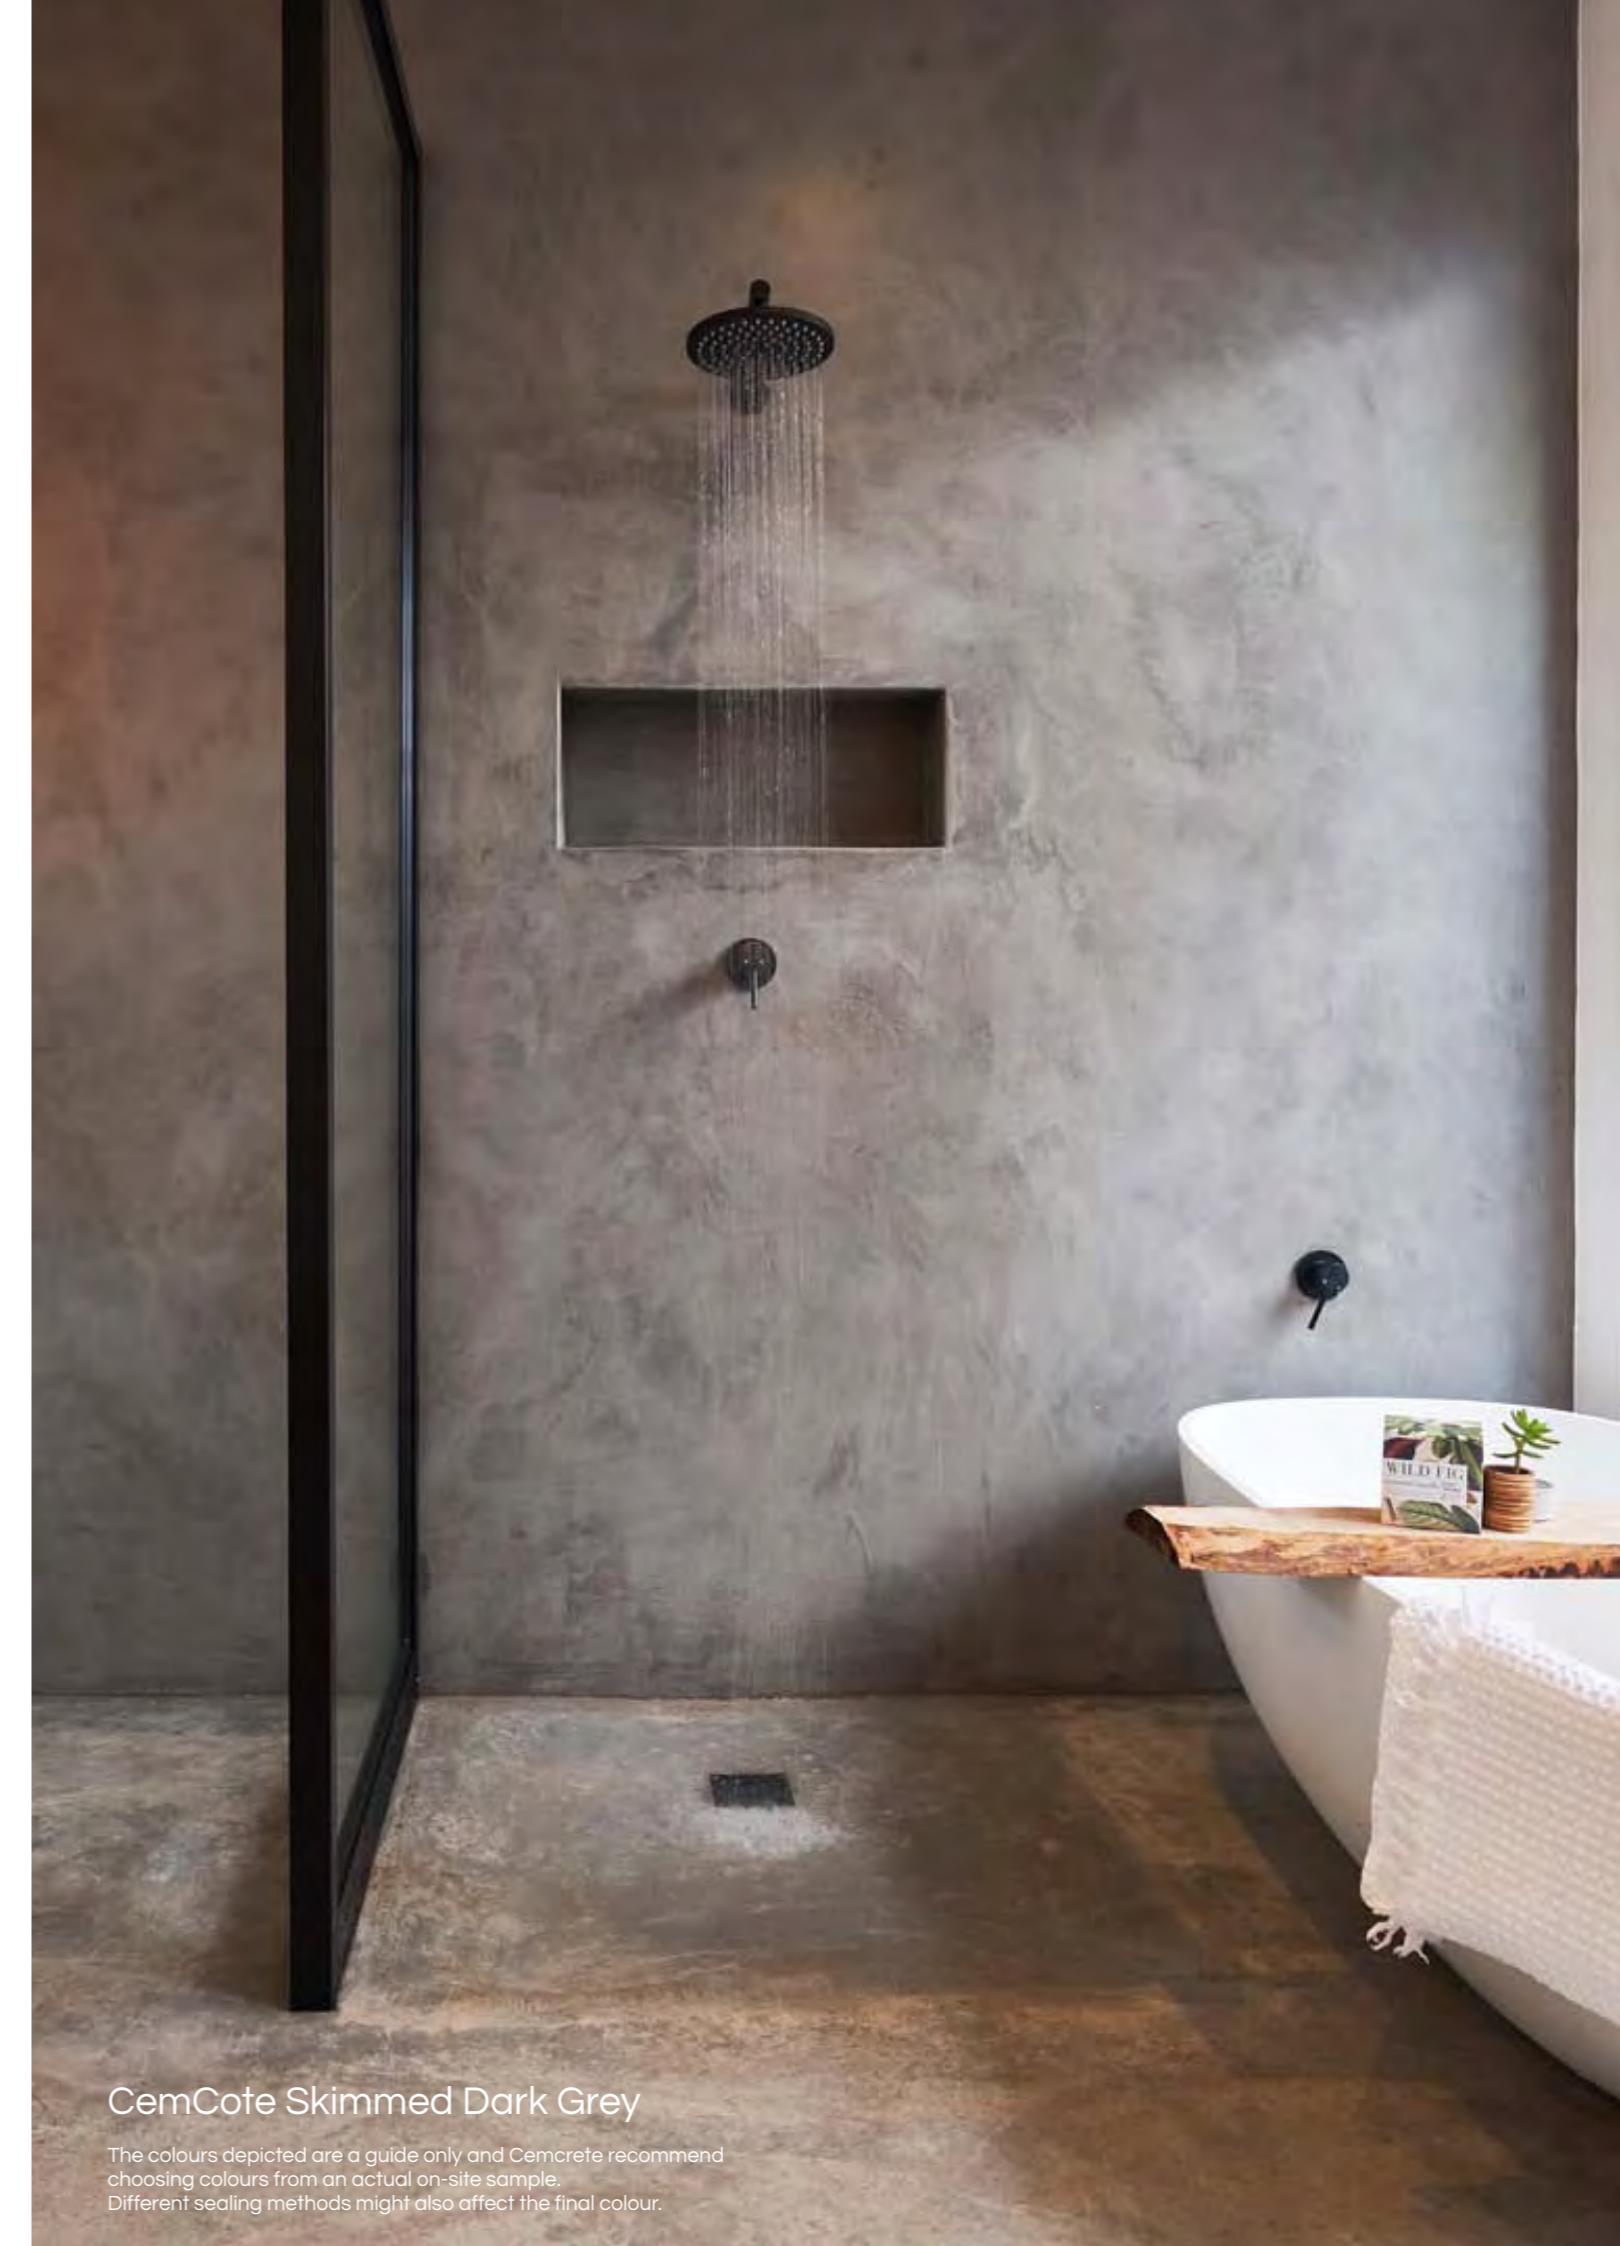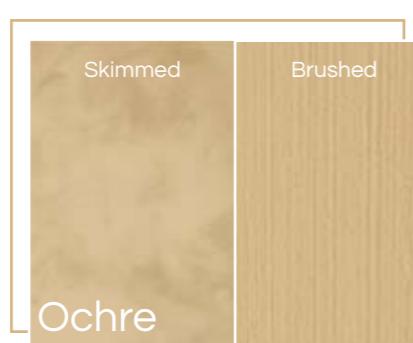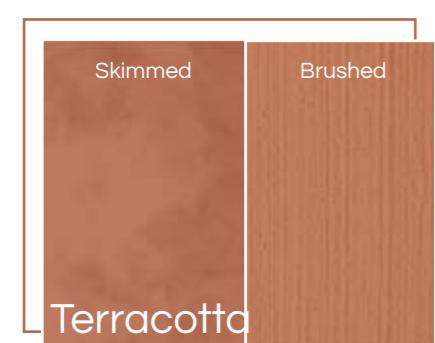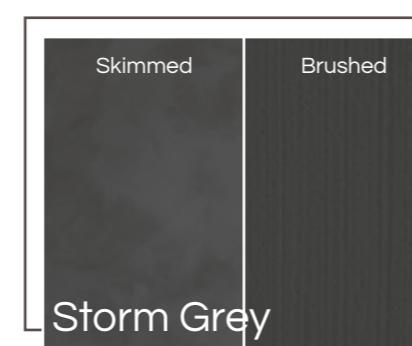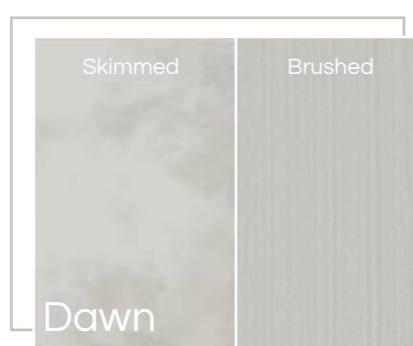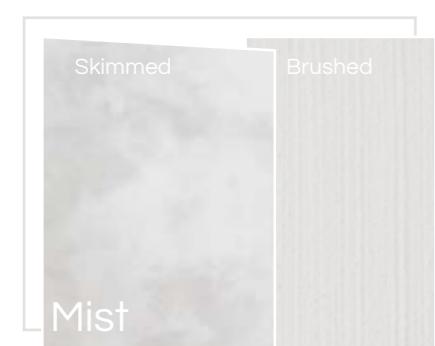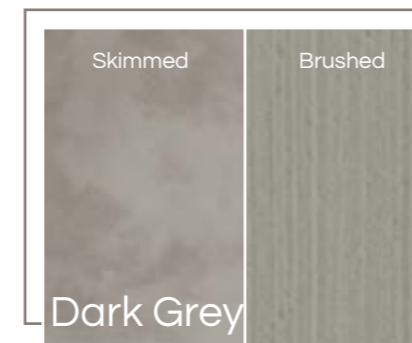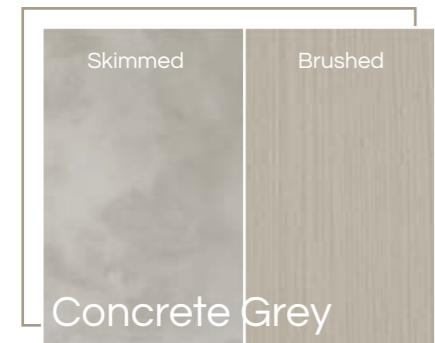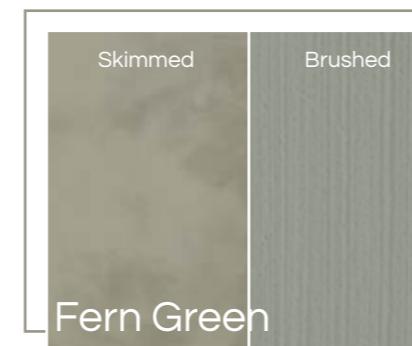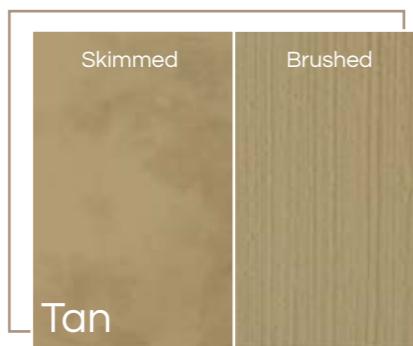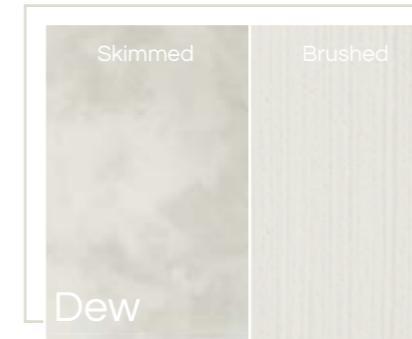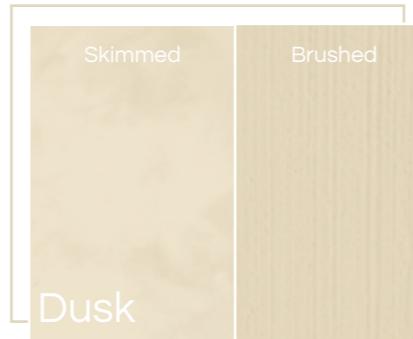

CemCote Skimmed Dark Grey

The colours depicted are a guide only and Cemcrete recommend choosing colours from an actual on-site sample.
Different sealing methods might also affect the final colour.

CEMCOTE | USES

